
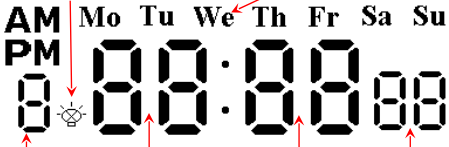


Lighten Up Model 308 (US version)




INSTRUCTIONS FOR USE:


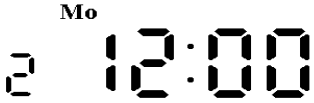



- 1) Plug your lamp into your *Lighten Up!*
- 2) Make sure the lamp is turned on; otherwise it will not light up in the morning.
- 3) You may use up to a 300-watt light bulb in your lamp. We recommend a 60 watt bulb to best simulate an actual morning sunrise.
- 4) **Use only incandescent light bulbs with *Lighten Up!***
A fluorescent, CLF, LED, or tensor light will not operate properly and may damage the unit.
 Do not plug Lighten Up! into an outlet with an ON /OFF switch.
- 5) To begin setup, press and hold (2 seconds) the left button (Button 1 in picture below) until the display flashes.

	Rocker Switch to turn lamp on or off. Center for sunrise. Switch left in the off position will kill the battery.	Buttons	Function
		Button 1 (left)	For Entering set up or changing mode
		Button 2 (center +)	For Adding time or moving forward
		Button 3 (right -)	For Reducing time or moving backward
Remarks: The settings change 1 minute at a time (6,7,8, not 6:15, 6:30, 6:45) Clock time is the default display. Input Power: 110V, 60HZ Maximum output: 300 watt,(incandescent lamp only) Button backup battery (3.6V with 2 year life) *Unit must be plugged into the wall and rocker switch must be centered or the battery will go dead very quickly*			



LCD Display

Default Values at initial start up.	Clock - Adjust to local time.		To enter Set Up and adjust Mode settings: 1: Press and hold "Button 1" for 2 seconds to begin Setup. 2: Press "Button 2" or "Button 3" to adjust. 3: After making changes, press "Button 1" for next option.
	Start Time of brightening cycle (Sunrise)		
	Length of brightening cycle. Add time for higher watt bulbs.		

1		→	Mode 1: Set "12/24" clock style
2		→	Mode 2: Set "Clock"
3		→	Mode 3: Set "Start Time for brightening cycle"
4		→	Mode 4: Set "Length of brightening cycle" (30-60 minutes)
5		→	Mode 5: Set " Additional on Time after sunrise" (1~24 hours)